

3MP All-Glass Automotive Lens



Description

The DSL259 is a lens specifically designed for automotive application. It has high thermal stability, lower flare and ghost. Balance quality at F#, RI, CRA etc.

Key Features

- All glass lenses
- Lower flare and ghost
- High thermal stability

Optical Specifications

Sunex PN DSL259	
Description	All-Glass
Imager Format	Up to 1/2.5"
Nominal Imager Resolution	3MP
Focal Length	3.4mm
Relative Aperture (F/#)	1.6
Image Circle	7.4mm
Field of View	130°@7.4mm 100°@5.76mm
Total Track Length	21mm
Distortion	-29% @5.76mm (F-tan Theta)
Chief Ray Angle	14.5°@5.76mm
IR cut-off filter	Optional 660nm


Applications

- Automotive

Excellence in Digital Imaging Optics

DSL259W-660-F1.6 Mechanical Dimensions [mm]:

Note: DSL259 is intended for use with Sunex CMT821.

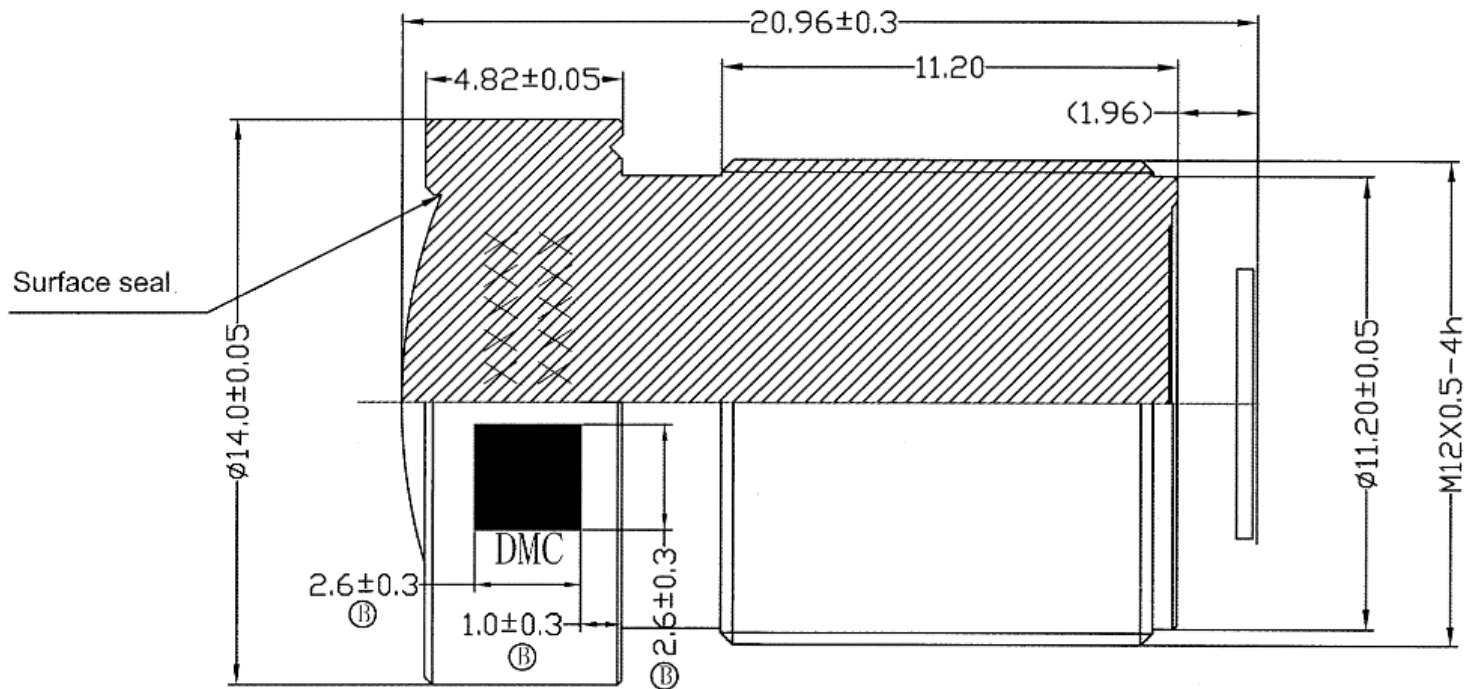

SUBJECT TO CHANGE WITHOUT NOTICE

Sunex, Inc.
Telephone: +1 760 597 2966
www.sunex.com